

# **The Torrento™**

**FP920 Series**





## **SPECIFICATION SHEET**



*Product Specifications subject to change*

# The Torrento™ Fan Assembly – FP920\*\*

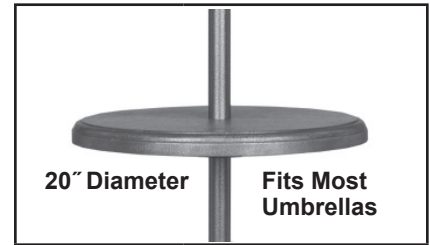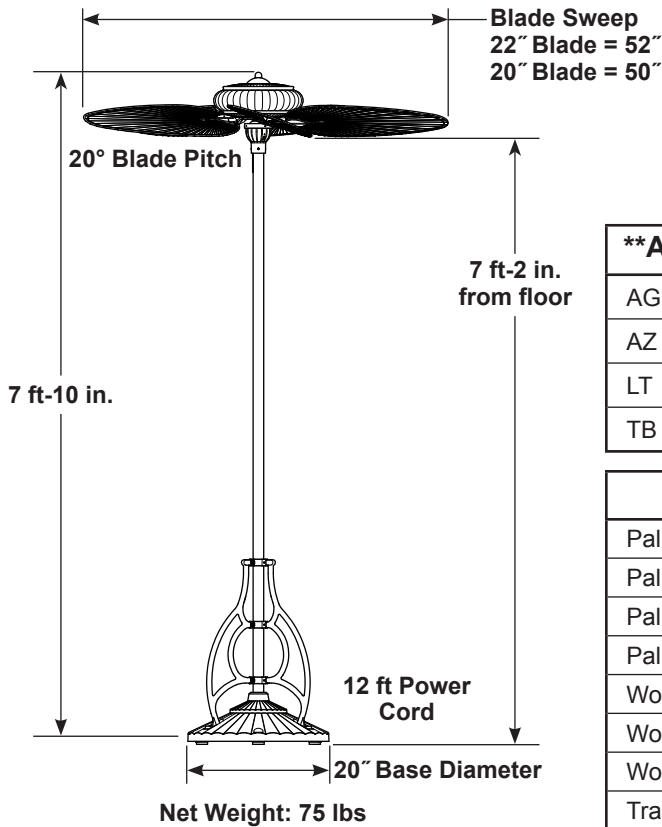

| **Available Fan Finishes |                |
|--------------------------|----------------|
| AG                       | Aged Copper    |
| AZ                       | Aged Bronze    |
| LT                       | Latte          |
| TB                       | Textured Black |

| Optional Table Accessory |                |
|--------------------------|----------------|
| TA92AG                   | Aged Copper    |
| TA92AZ                   | Aged Bronze    |
| TA92LT                   | Latte          |
| TA92TB                   | Textured Black |

| Available Plastic Blades |         |                           |
|--------------------------|---------|---------------------------|
| Palm Leaf                | BPP1    | Natural - 22" Wide Oval   |
| Palm Leaf                | BPP4    | Natural - 22" Narrow Oval |
| Palm Leaf-Brown          | BPP4BR  | Painted - 22" Narrow Oval |
| Palm Leaf-Green          | BPP4GR  | Painted - 22" Narrow Oval |
| Woven Bamboo             | BPD1A   | Antique - 22" Wide Oval   |
| Woven Bamboo             | BPD4A   | Antique - 22" Narrow Oval |
| Woven Bamboo             | BPD4BL  | Black - 22" Narrow Oval   |
| Traditional Wood         | BPW10CY | Cherry - 20" Narrow       |
| Traditional Wood         | BPW10WO | Washed Oak - 20" Narrow   |

## INSTALLATION REQUIREMENTS:

Base of fan must be secured to floor using one of the following methods: Three 3/8"-7/16" lag screws are included for wood floor applications. 3/8"-7/16" lag bolt/lag shields are included for concrete floor applications.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit with Ground Fault Protection. 12 ft power cord with 3-prong plug is included. Can be hard-wired directly to "weather-tight" junction box.

## FAN SPEED:

3-speed pull-chain with reversing switch (on the motor). Approximate speeds (depending on blade selection)  
1st Pull-High – 145 rpm; 2nd Pull-Med – 95 rpm; 3rd-Low – 60 rpm;

## BLADE OPTIONS:

Wet-Location (Plastic - BP, BPD & BPW Series) Palm, Bamboo, and Wood blades are available (sold separately in sets of 5). See catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more information.

## DAMP / WET LOCATION:

Fan rated for both Damp & Wet Location usage.



10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

