


# **The Vetricco<sup>TM</sup>**

## **FP3120 Series**




# **SPECIFICATION SHEET**

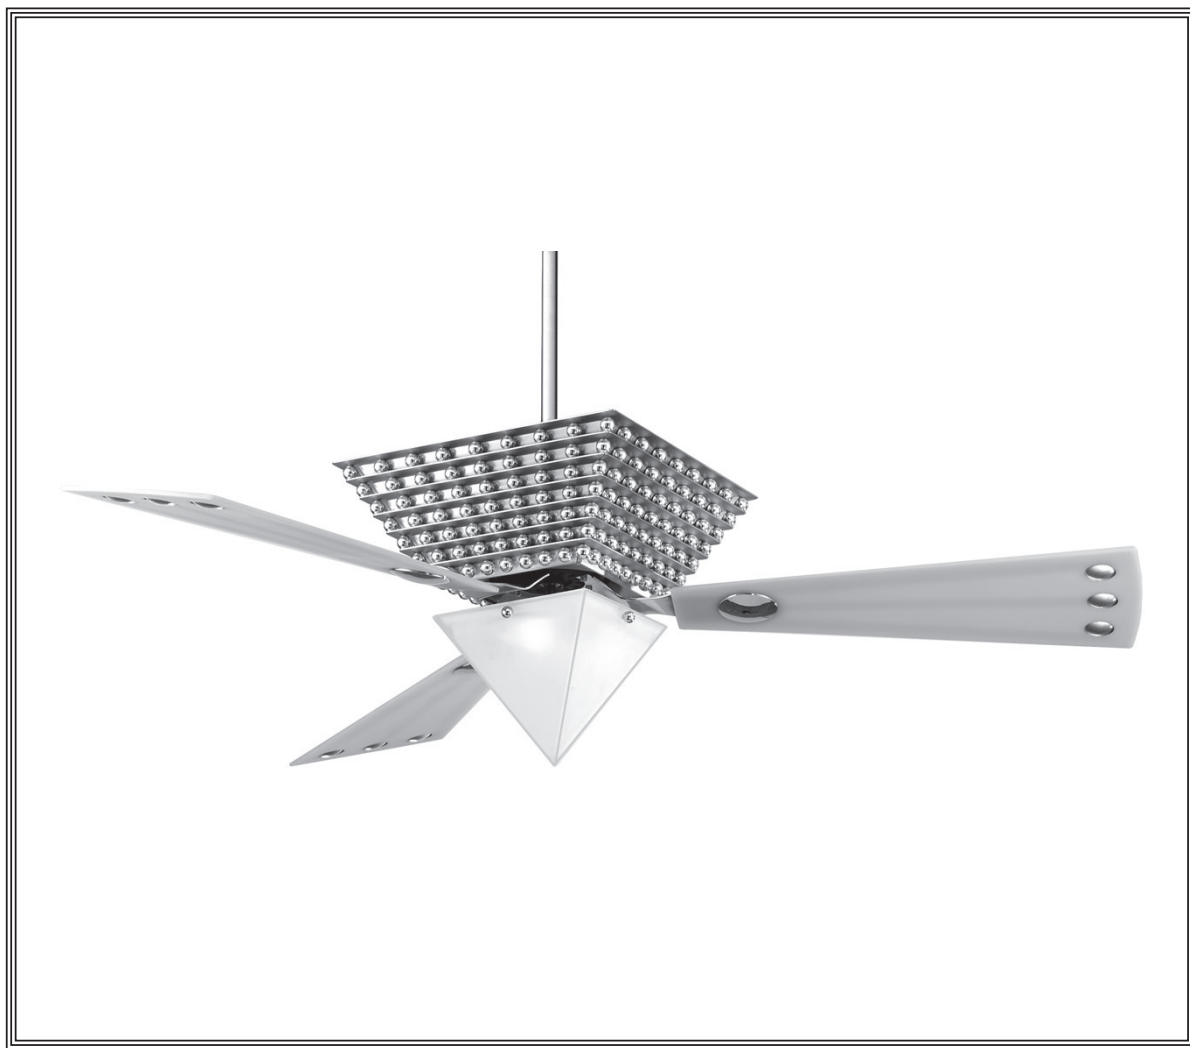

*Product Specifications subject to change*

# The Vetricco™ Fan Assembly – FP3120\*\*

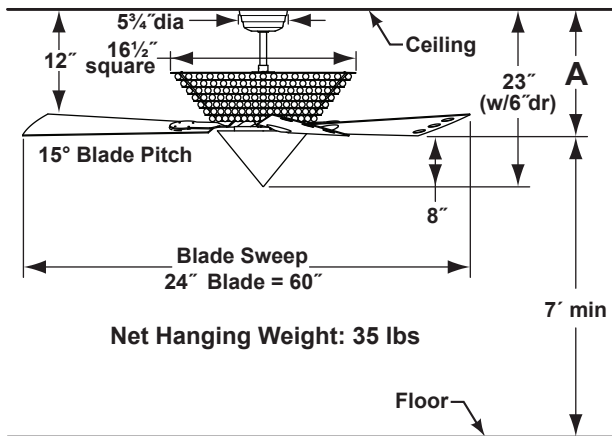

Dimensions shown in inches

Available Finishes	
GB	Glossy Black/Chrome Balls
SN	Satin Nickel/Chrome Balls

Fan Assembly	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 3 fan speeds with reversing switch (on top of the motor). 220 VAC, 50 Hz export version is available.

**Fan Speeds:** Low – 75 rpm; Med – 115 rpm; High – 150 rpm

## CONTROL OPTIONS:

The hand-held remote control (C26) and canopy-style receiver unit (RECAN68UD) are included. Pushbutton control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate fan speeds, infinite light levels, and off button. Reversing switch located inside fan housing on upper socket housing. Installation and operating instructions provided with control.

## LIGHTING OPTIONS:

The 3-bulb (40 watt max) uplight and 3-bulb (40 watt max) downlight fixtures are included with this fan assembly with a maximum of 300 watts (candelabra bulbs - not included). Maximum wattage including uplight and downlight not to exceed 300 watts.

## DOWN ROD OPTIONS:

The Vetricco™ fan comes with a standard 6" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Vetricco™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

## BLADE SETS:

A set of 3 plastic blades are included with this fan.

## DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

