

Type:

Job:

Fixture Catalog number:

LLV121BL

Fixture and Finish

Mounting Options:

Stake Mount Only (Included)

Ordered Separately from Fixture

Approvals:

Date:

Page: 1 of 1

Specifications

Top, Louver and Husk: Interlocking die-cast aluminum sections, drawn together with three stainless steel screws.

Globe: Diffuse glass, threaded to husk, with silicone gasket.

Stem: 20 mm aluminum pipe with 20 mm thread for attachment to husk and stake.

Stake: Die-cast aluminum, included.


Socket: GY6.35 socket for bipin lamp.

Wire: 3' #18-2 SPT wire with fork connectors.

Lamp: 50-watt T-4 Bipin Halogen lamp included.

Finish: Black powder coat finish only.

Certification: UL Listed to U.S. and Canadian safety standards for wet locations. Fixture manufacturer shall employ a quality program that is certified to meet the ISO 9001:2000 standard.

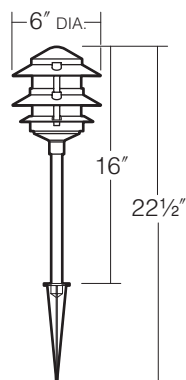

ORDERING INFORMATION

Fixture*

LLV121BL

Wattage / Lamp

50W

T-4 Halogen included

MOUNTING INFORMATION:

Stake Mount Only (included)

*Remote transformer required.



Lighting, Inc.

